

## HDW1200M

---

2Megapixel 1080P Water-proof IR HDCVI Mini Dome Camera



### Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@1080P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V


# HDW1200M

## Technical Specifications

|                       |                                                  |  |
|-----------------------|--------------------------------------------------|--|
| Model                 | HDW1200MN                                        |  |
| Camera                |                                                  |  |
| Image Sensor          | 1/2.7" 2Megapixel CMOS                           |  |
| Effective Pixels      | 1930(H)×1088(V)                                  |  |
| Electronic Shutter    | 1/60s~1/100,000s                                 |  |
| Video Frame Rate      | 30fps@1080P                                      |  |
| Synchronization       | Internal                                         |  |
| Min. Illumination     | 0.01Lux@F1.2(AGC ON), 0Lux IR on                 |  |
| Video Output          | 1-channel BNC HDCVI high definition video output |  |
| Camera Features       |                                                  |  |
| Max. IR LEDs Length   | 20m, Smart IR                                    |  |
| Day/Night             | Auto(ICR) / Color / B/W                          |  |
| Noise Reduction       | 2D                                               |  |
| Lens                  |                                                  |  |
| Focal Length          | 3.6mm (6mm optional)                             |  |
| Angle of View         | H: 80.6° (57.55° )                               |  |
| Mount Type            | M12                                              |  |
| General               |                                                  |  |
| Power Supply          | DC12V±20%                                        |  |
| Power Consumption     | Max 2.5W                                         |  |
| Working Environment   | -30°C~+60°C / Less than 95%RH (no condensation)  |  |
| Transmission Distance | Over 300m via 75-3 coaxial cable                 |  |
| Ingress Protection    | IP66                                             |  |
| Dimensions            | Φ94.0mm×79.5mm                                   |  |
| Weight                | 0.35kg                                           |  |
| Material              | Metal                                            |  |

# HDW1200M

## Dimensions (mm)

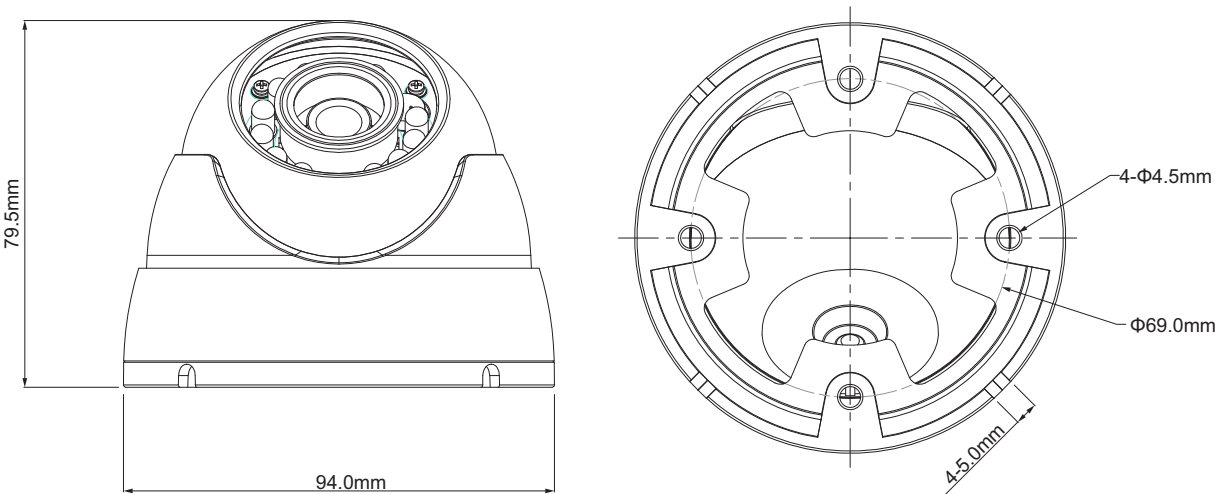

## Accessories (optional)

|                                                                                    |                                                                                    |                                                                                     |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| PFA121                                                                             | PFA151                                                                             | PFA152                                                                              |